


# M300K

LOAD CLASS  
**UP TO C250**  
EN-1433 STANDARD


ULMA Linear Drainage Channel type M300K: External width 360 mm; Internal width 300 mm and overall height 150 mm to collect rainwater in 1 metre long units Integrated galvanized steel edges for lateral protection. Locking system consists of locking bar CS300 and screws.

MINI

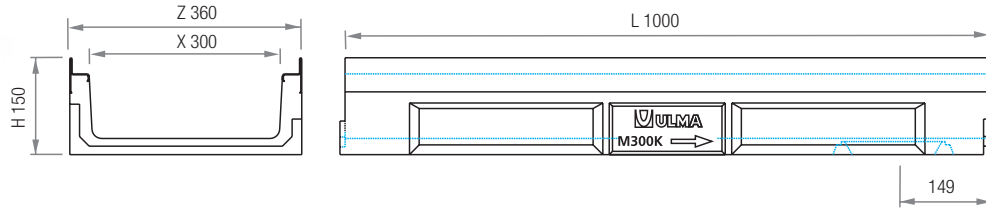

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm <sup>2</sup> )	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M300K	1000	150	360	300	200	-	294	24

\*Vert. outlets on order.



## GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Opening (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FN300KCCM	500	351	14	2
GALVANIZED STEEL	MESH	B125	GEX300KCB	1000	351	30 x 20	1

## LOCKING SYSTEM

LOCKING BAR.  
Two locking bars and two screws per linear metre.



END CAPS	Closed
Code	Type
T300MKC	CLOSED

